



Shan Pu

Push Select Series SF20EA




General Specifications

Switch Circuit	:OFF→ON→ON→ON
Switch Contact Rating	:1A @ 30VDC
Contact Resistance	:500mOhm Max.(initial)
Insulation Resistance	:100MOhm Min.
Operating Force	:500gf ± 100gf
Total Travel	:1.5mm ± 0.5mm
Mechanical Life	:100,000 cycles Min.
Operating Temperature	:-10 °C ~ +60 °C

Materials




Cap	:Polycarbonate (PC)
Housing	:Polyamide (PA)
SW Reflector	:Polyacetal(POM)
SW Terminal	:Brass with gold plating
SW Spring	:SUS
SW Contact	:Brass with gold plating

Contact Configuration



Pin	Function
1	COM
2	1-2 N.O.
3	1-3 N.O.
4	1-4 N.O.

Dimension & Panel cutting

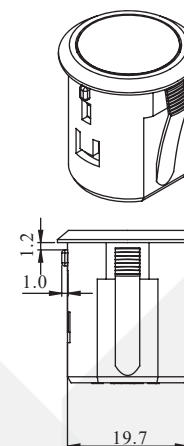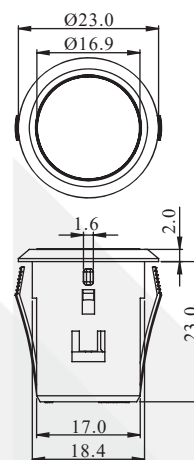

Panel cutting
Panel thickness :
1.5~4mm

How to order



SF20EA551

Black Housing /
Black Cap with Marking 1



SF20EA552

Black Housing /
Black Cap with Marking 2

※ Color is subject to actual product.
※ We provide Marking service.

Option



Cable: YCW016
Cable: UL1007#26AWG
Conductor pitch : 2.0mm
Conductor width : □0.5mm