



## Hall effect Joystick ZHJB



### General Specifications

Power input	:DC 5V ±0.5V
Output	:Analog 0~5V
Type	:3 axes, X-Y axes and Z axis (rotary)
Operation life	:X-Y axes 5 million cycles min. Z axis 1 million cycles min.
Operating Temperature	:-20 °C ~ +65 °C

### Feature


- X, Y and Z axes joystick plus push button switch
- Long operating life
- panel mounting
- water-proof

### Application

- Industrial equipment
- Medical equipment
- Surveillance & Security Cameras
- DVR/PTZ control

### Configuration & Pin define



- DC 5V(RED)
- GND(BLACK)
- X OUTPUT(BLUE)
- Y OUTPUT(YELLOW)
- Z OUTPUT(GREEN)
- SW(WHITE)
- SW(BROWN)
- N/C

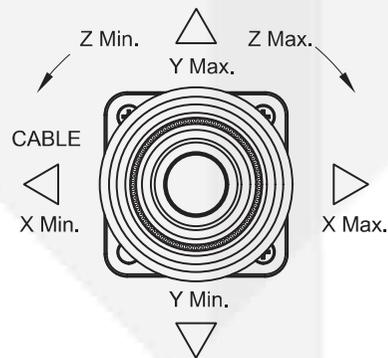

### Pins define



### Dimension & Panel cutting recommend

ZHJB02-D2

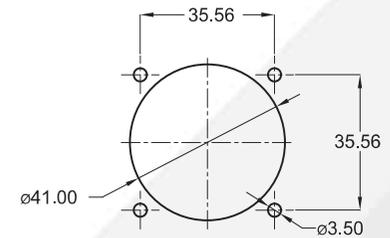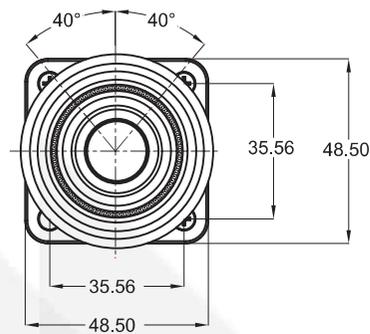

### PANEL MOUNTING

### OPERATING ANGLE

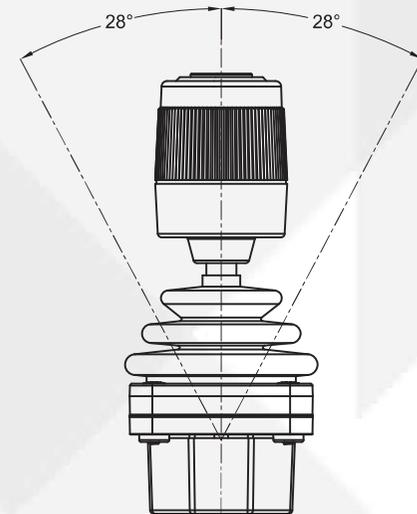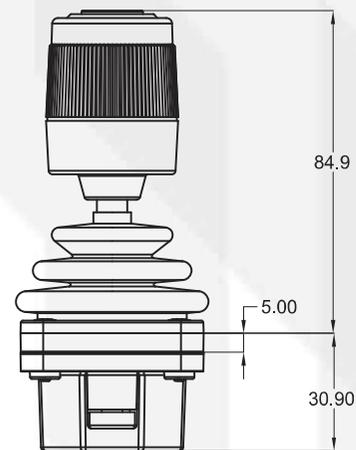

Dimension shown in mm. Specifications and availability subject to change without notice.