



Shan Pu

Pushbutton Switches Series ZR18-29

General Specifications

Contact Resistance	: 30m Ohm Max(initial)
Insulation Resistance	: DC 500V 100M Ohm Min
Dielectric strength	: AC 1000V 1 Minute
Operating Force	: 0.3Kgf (Min)
Solder ability of terminal	: 250°C for 2 seconds
Operating Temperature	: 0°C ~ + 65°C



ZR18-29 Series	ZR18-29A-□	ZR18-29B-□	ZR18-29C-□
Circuit	(ON)-OFF	ON-(OFF)	ON-OFF
Rating	1A 250VAC / 3A 125VAC	1A 250VAC / 3A 125VAC	1A 250VAC
Electrical Life	6,000 Cycle Min.	6,000 Cycle Min.	10,000 Cycle Min.
Mechanical Life	10,000 Cycle Min.	10,000 Cycle Min.	20,000 Cycle Min.


Material

Cap	: Acrylonitrile Butadiene Styrene (ABS)
Case Cap	: Zinc Casting Alloys
Case	: Polyarylethersulfone(PES) for ZR18-29A , ZR18-29B Polyamide (PA) for ZR18-29C
Spring	: Piano wire
Terminal	: Copper Alloy, silver or gold plating

Application


Public building ,Home Security , Business building , Industrial equipment

Instal Hole



How to order

/ ZR18-29A

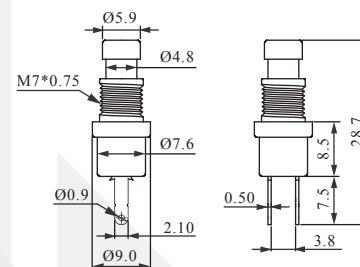


ZR18-29A-B
(ON)-OFF
Momentary
Black cap



ZR18-29A-R
(ON)-OFF
Momentary
Red cap

/ ZR18-29B

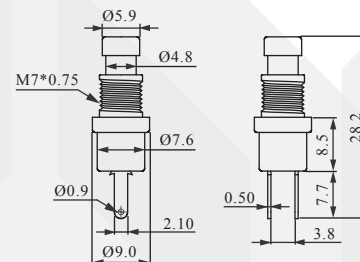


ZR18-29B-B
ON-(OFF)
Momentary
Black cap



ZR18-29B-R
ON-(OFF)
Momentary
Red cap

/ ZR18-29C

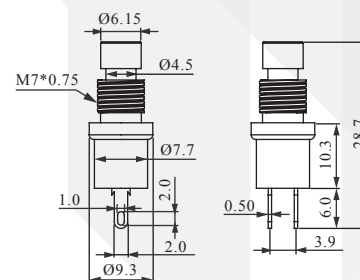

ZR18-29C-B
ON-OFF
Alternate
Black cap



ZR18-29C-R
ON-OFF
Alternate
Red cap