



16 POSITIONS  
ZRSJ-2FRM




10 POSITIONS  
ZRSJ-2ARM



SPECIFICATIONS:

1. MAXIMUM RATING: 50VDC, 100mA.
2. MINIMUM RATING: 20mVDC, 1μA.
3. CONTACT RESISTANCE: 100mΩ MAX.
4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
6. ROTARY TORQUE: 40~200gf.cm
7. TOTAL ROTARY ANGLE: 360° (10 or 16 STEPS)
8. LIFE CYCLE: 10,000 STEPS

P.C.B. LAYOUT



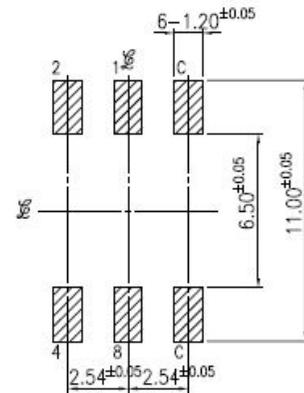


HATCHED AREA SHOW SOLDERING LAND

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	LCP+G	1	
2	COVER	SUS	1	
3	SPRING PLATE	SUS	1	
4	ROTOR	LCP+G	1	
5	TERMINAL	PBS	6	Au/Sn PLATED
6	CONTACT PLATE	BeCu	1	Au PLATED
7	O-RING	SILICONE RUBBER	1	
8	SPACER	SUS	1	

CIRCUIT CHART

		CODE				
		C	1	2	4	8
10 POSITIONS	0	●				
	1	●	●			
	2	●	●	●		
	3	●	●	●	●	
	4	●	●	●	●	●
	5	●	●	●	●	●
	6	●	●	●	●	●
	7	●	●	●	●	●
	8	●	●	●	●	●
	9	●	●	●	●	●
16 POSITIONS	A	●	●	●	●	●
	B	●	●	●	●	●
	C	●	●	●	●	●
	D	●	●	●	●	●
	E	●	●	●	●	●
	F	●	●	●	●	●
	G	●	●	●	●	●

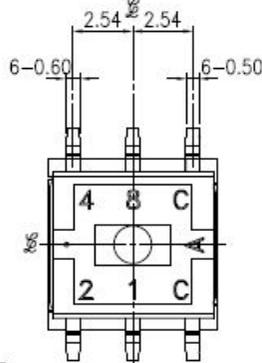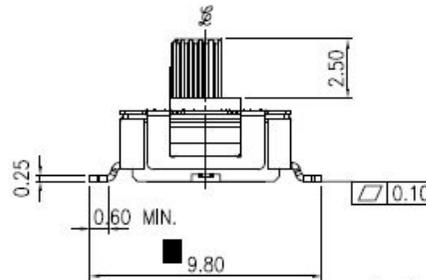

SHANPU CO., LTD.

△			
△			
△			
△			
△			
SYM	DISCRIPTION	DATE	APPROVED

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'		SIGNATURES	DATE	TITLE
REVISIONS	 SCALE 5/1	DRAWN		ROTARY SWITCH
A		CHK'D		NO.
		APPV'D		ZRSJ-2_RM-A