
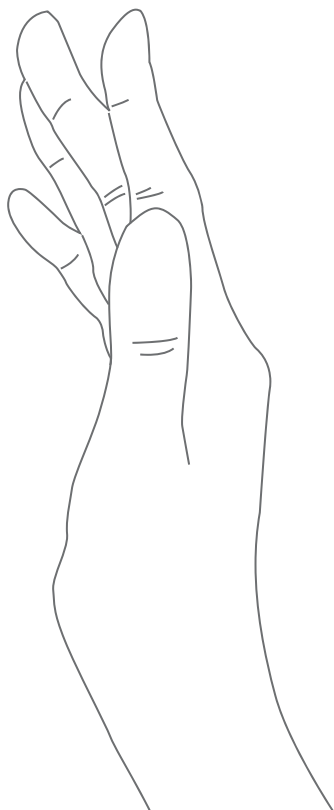


SF30BF

Contacless Infrared Sensor Switches

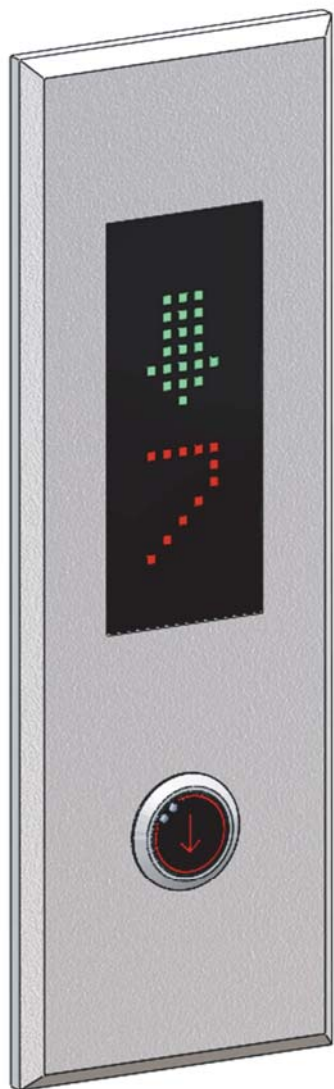

Features


- Do not touch the buttons directly, reducing the chance of germ infection
- Two-color indicator light (on/sensor):
Green light/Red light, Blue light/Red light
- Metal shell surface anode natural or Black
- Lens can be customized printing service
- Adjustable induction delay time 5~60 seconds
(The initial value is 5 seconds)
- Through infrared reflection induction, control circuit switch or signal output

Specifications

- Apperance : Round shape,
outer diameter $\Phi 34\text{mm}$, Height 23mm
- Material : Aluminum , PC+UV , PA
- Panel cutting : $\Phi 30\text{mm}$
- Waterproof rating : IP67
- Working temperature : $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
- Working voltage : 7~24V
- Maximum sensing distance : 5cm

Application

- Elevator button / Door switch
- Industrial equipment / Medical equipment

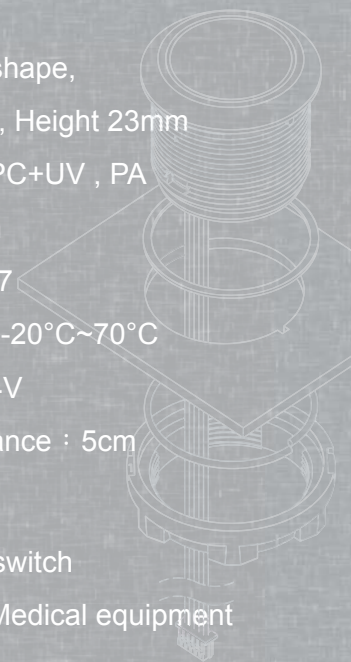

SF30BF171001

Relay type

Load Rating	:1A@30 VDC / 0.3A@125VAC
Maximum Current	:2A
Maximum Voltage	:250VAC / 220VDC
Maximum Power	:62.5VA/60W
Mechanical life	:500,000 cycles Min.
ON / Sensing	:Blue / Red LED

SF30BF231502

Photo Coupler type

Collector-Emitter Voltage	:35V
Collector Current	:50mA
ON / Sensing LED	:Green / Red LED



尚圍股份有限公司 SHANPU CO., LTD.

247新北市蘆洲區國道路二段26號7樓
7F, No.26 Sec. 2 Guodao Rd., Luzhou Dist.,
New Taipei city, Taiwan 247

TEL : 886-2-89832999
FAX : 886-2-89832789

<https://www.shanpu.com.tw>
E-mail : info@shanpu.com.tw